

**TENDER FOR PROPOSED INTERIOR FURNISHING, ELECTRIFICATION & AIR - CONDITIONING WORKS TO BE EXECUTED FOR NANDANVAN BRANCH, NEW PREMISES, CENTRAL BANK OF INDIA, NAGPUR (M.S.)**

TOTAL OF ANNEXURE Rs. \_\_\_\_\_

“INTERIOR FURNISHING WORKS” (A)

Rs. (in words) \_\_\_\_\_

TOTAL OF ANNEXURE Rs. \_\_\_\_\_

“ELECTRIFICATION WORKS (B)

Rs. (in words) \_\_\_\_\_

(I) NET TOTAL = Rs. \_\_\_\_\_

(Annexure-'A' +Annexure-'B')

Rs. (in words) \_\_\_\_\_

(II) ADD CGST @ 9.00% Rs. \_\_\_\_\_

(III) ADD SGST @ 9.00% Rs. \_\_\_\_\_

(IV) GRAND TOTAL Rs. \_\_\_\_\_

(I + II + III )

RUPEES \_\_\_\_\_

“AIR CONDITIONING (High side) WORKS”

ADD CGST @ 14.00% on ( 'C' ) Rs. \_\_\_\_\_

ADD SGST @ 14.00% on ( 'C' ) Rs. \_\_\_\_\_

(V) GRAND TOTAL (High side works)

(Including GST) Rs. \_\_\_\_\_

TOTAL OF ANNEXURE -'C-1' Rs. \_\_\_\_\_

“AIR CONDITIONING (Low side) WORKS”

ADD CGST @ 9.00% on ( 'C-1' ) Rs. \_\_\_\_\_

ADD SGST @ 9.00% on ( 'C-1' ) Rs. \_\_\_\_\_

(VI) GRAND TOTAL (Low side works)

(Including GST) Rs. \_\_\_\_\_

GROSS TOTAL : (IV + V + VI ) Rs. \_\_\_\_\_

RUPEES \_\_\_\_\_

**Signature & Seal of Contractor**

**Regional Head**

Nagpur Region, Central Bank Of India,  
Oriental Building, Second Floor,  
LIC Square, Station Road,  
Nagpur(M.S)

**TENDER  
ANNEXURE- A**

Interior Furnishing work – Branch

**NAME OF WORK : TENDER OF INTERIOR FURNISHING WORKS TO BE EXECUTED  
FOR NANDANVAN BRANCH, CENTRAL BANK OF INDIA, NAGPUR (MS)**

**NAME OF CONTRACTOR** \_\_\_\_\_

| Item No. | Description   | Quantity | Rate    | Per  | Amount  |
|----------|---|----------|---------|------|---------|
|          |   |          | Rs. Ps. |      | Rs. Ps. |
| 1        | <p><b>FALSE CEILING- GYPSUM</b><br/>           Providing and fixing in position all levels, M/F suspended ceiling horizontal and vertical faces [Regular Single layer; Code: Gs- MFSc-4] manufactured by India<br/> <u>Gypsum as per manufacturer specifications and following details :-</u><br/>           a) G.I. Perimeter channels will be of size 20 mm [one flange] x 27mm [web] x 0.55 mm [thick] will be screw fixed to wall / partition with the help of nylon sleeves and Screws @ 610 mm c/c .<br/>           b) Suspending G.I. Intermediate channels of size 15mm [flanges] x 45 mm [Web] x 0.90mm [thick] from soffit @ 1220mm c/c with ceiling angle of size 25mm x10mm x 0.55 mm [thick] fixed to soffit with G.I. Cleat and steel expansion fasteners.<br/>           c) Suspender as per manufacturer specifications to be provided as directed.<br/>           d) Fixing ceiling section of size 51.5 mm [knurled web]x 26 mm [web] x10mm [lips] x 0.55mm [thick] perpendicular to the intermediate channel with the help of connecting clip @ 457mm/c.<br/>           e) Fixing 12.5 mm thick tapered edge plain Gyp board by mechanically screwing to the ceiling section with 25 mm drywall Screw @ 230mm c/c.<br/>           f) Joining and finishing the boards for a flush look including filling and finishing the tapered and square edges of the Board with jointing compound, joint paper tape and two coats of drywall top coat suitable for Gyp board<br/>           g) Making frame for all light fittings, grills, diffusers, cutouts and Trap door if any etc. with perimeter channel and supporting suitably over false ceiling framework without any extra cost.<br/>           h) Angle beads, control joints, etc. are to used without any extra cost wherever required at site and as directed<br/>           i) Providing and fixing hand cast 1st grade POP moulding of size 75 mm to 150 mm deep at the junction of the Gyp board ceiling and wall/ column / beam etc. With necessary filling on the backside including finishing as per drawing &amp; as directed by the Architect.<br/>           j) Applying Acrylic Emulsion (Dulux ICI paints) of approved make, shade and colour of 3 or more coats to the satisfaction of the architect. The false ceiling is considered in Banking Hall as directed.</p> | 85.00    |         | Sqmt |         |

|    |  |       |  |       |  |
|----|--|-------|--|-------|--|
| 1a | <p><b>FALSE CEILING</b><br/> MODULAR FALSE CEILING (600 X 600 mm)- Providing and fixing of Mineral Fiber Board Acoustical Suspended Ceiling System with Dune RH99 (600X600mm) Microlook edge tiles 16mm thick placed on Silhouette (15mm thick) grid of required size To Place the Tiles on Exposed Silhouette grid of Armstrong make or equivalent.(as approved by Bank's Architect/ competent authorities)The tiles should have Humidity Resistance (RH) of 99%, NRC 0.7, Light Reflectance 90%, Thermal Conductivity k=0.052-0.057 w/m K, Colour White, Fire Performance UK Class 0/ Class 1 (BS 476 pt – 6&amp;7) in module size of 600x600x16 mm, suitable for Green Building application, with Recycled content of 32%. The items includes all materials, tiles, fixing, finishing etc. Complete.</p>  | 65.00 |  | Sqmt  |  |
| 2  | <p><b>COLUMN / WALL PANELLING :</b><br/> Providing and fixing panelling to walls / Columns, internal faces of columns and as required and as directed by architect with 12mm thick ply of MR grade of standard make confirming to IS-303of approved Make &amp; brand finished with 1.0mm thick Laminate of approved brand, shade &amp; colour in multicolour and Approved pattern and design as directed by the Architect. The rate shall be inclusive of work in Multicolour Laminates, grooves. All necessary hardware, tools and plants required for the work to make to the column in true line and level.</p>   | 55.00 |  | Sqmt  |  |
| 3  | <p><b>ENTRANCE DOOR</b><br/> <b>Toughened Glass Door With Partition</b><br/> <b>With Profile Section</b><br/> Providing &amp; fixing toughened glass door with fixed partition (if any) in profile section or as directed at the entrance facade as per design, drawing and as directed by architect made out of 12 mm thick Toughened safety glass (modi/Asahi/St.Gobain ) with diamond edge polish for exposed edges &amp; 2.5" round cut in the glass as per design. Glasses should be fixed in S.S. finished D-brackets etc. Wherever required with metal patch fittings at Top/Bottom /Corner/profile section for fixed glass (Dorma /Ozone) Make or equivalent as approved by Bank authorities for door shutter. For Glass partition wherever required if any, the Glass panels can be Bolted together with stainless steel Stub post which are into concrete through core drill holes or supported by stainless steel clamp fixing to vertical posts on each sides as per requirement and as directed by Architect, with necessary bevelling etc. complete fixed on floor spring of Ozone/ Dorma/Godrej Make <b>(I.S.I mark, Heavy duty, Item taken Separately)</b>. The shutters shall have stainless steel Handle 450 mm on both sides of approved make, with erection, fixing, finishing etc. Complete and as directed by Architect. alternativeley The fix glass partition, if any, are to be fixed by providing profile section @ Top &amp; Bottom if the partition height are upto 9'-0" ht. Or as directed by the Bank/ Bank Architect. The entire glass partition is to be finished with one way film, bank logo or as per banks requirement or as directed by Architect.</p> | 17.00 |  | Sqmt. |  |

|   |  |      |  |       |  |
|---|--|------|--|-------|--|
| 4 | <p><b><u>Wicket Gate</u></b><br/> Providing and fixing wicket gate of required height near CTO counters made out of framework of standard Aluminium rectangular section (40 X 40mm X 1.20mm Thickness) of size 600 X400 mm c/c covered with 6mm thick ply of MR Grade confirming to IS-303 ISI Mark of approved make &amp; brand and finished with 1.00 mm thick Laminate of approved brand, shade &amp; colour in multicolour on both sides. Brass hinges 75 mm long, Brass Tower Bolt 100 mm long, and handles 100 mm long shall be painted / polished of desired shade as per designed specifications.</p>  | 3.00 |  | Sqmt. |  |
| 5 | <p><b><u>MANAGER CUBICAL PARTITION</u></b><br/> Providing &amp; Fixing Low/ full height partly glazed and Partly panelled partition at required positions of required height, as per drawing, design and as directed by the Architect. (Glazed portion at required places) made out of framework of standard Aluminium Rectangular section (40 X 40mm X 1.20mm Thickness) of size 600 X400 mm c/c covered with 6 mm thick ply of MR Grade of ISI Mark confirming to IS-303 of approved make &amp; brand on both sides &amp; finished with 1.0mm thk Laminate of approved brand, shade &amp; colour of approved shade and design on both side of partition. The glazed portion shall be 10 mm thick clear float glass with itching as per design &amp; drawing &amp; as directed. fixed with MDF beading of required size on inner side of the partition. All the exposed faces of hard wood and MDF beading shall be finished with 1 st quality Duco Paint of approved shade and directed by the Architect. The overall thickness of the partition shall be 50mm.</p>  | 9.00 |  | Sqmt. |  |
| 6 | <p><b><u>MANAGER'S TABLE</u></b><br/> Providing and fixing Manager's Table of size 1800x800x750 mm in height or of required size with one drawer &amp; storage shutter below it with midshelf, Footrest &amp; CPU arrangement made out of 18mm thick ply of MR Grade of ISI mark confirming to IS-303 of approved make &amp; brand and finished with 1.0 mm thick Laminate of approved brand, shade &amp; colour on exposed outer surfaces and <b>Glass top of 12mm thk.</b> (Modi float/Asahi/ St. Gobain) with beveled Etching as per design, drawing and as directed by the Architect. One key board arrangement is to be made in the table and necessary arrangement for computer casing if required inclusive of Brass fittings, hinges, Godrej/hettich/ozone locks (concealed) to all drawers, Powder coated handle, Ebco drawers sliders (Telescopic) And Keyboard channels, handles etc. complete. All internal exposed surfaces shall be finished in 0.8mm thick laminate &amp; all inside hidden faces except the bottom of the drawer shall be finished with French spirit polish in two or more coats with finishing, carting, erection including T.W. Beading required for table etc. complete.</p> | 1.00 |  | Nos.  |  |

|   |   |      |  |      |  |
|---|---|------|--|------|--|
| 7 | <p><b>MANAGER'S TABLE SIDE RACK</b><br/> Providing and fixing Side table /rack of size or of required size 1000x400x750 mm in height – 1 No. in Manager's Cubical /cabin as per design, drawing and as directed of I.S.I. Mark confirming to IS-303 1st quality of approved make &amp; brand and finished with 1.0 mm thick laminate of approved brand, shade &amp; Colour (as approved by Bank's architect/competent authority.) sheet of approved shade by Architect with provision of drawers and below it storage cabinet with openable shutters/ sliding shutters, powder coated handle, Ebco drawers sliders (telescopic), etc complete as directed. All Internal exposed surfaces shall be finished in 0.8mm thick laminate and all inside hidden faces except the bottom of the drawer shall be finished with french spirit polish in three coats with finishing, carting, erection and including T.W. Beading required for table etc. complete.</p>  | 1.00 |  | Nos  |  |
| 8 | <p><b>COUNTER TABLE (FRONT ROW) –</b><br/> Providing Counter Tables for officers/clerk of various size as per drawing and as directed with working top &amp; or as required one Key Board arrangement is to be made in the table along with one drawer &amp; storage shutter below it with midshelf, Footrest, arrangement for CPU as per drawing &amp; as Directed and necessary arrangement for computer casing if required inclusive of Brass fittings, Hinges, drawer &amp; keyboard channel (Telescopic), Handles, concealed locking arrangement to all drawers with Godrej locks etc. Complete as per drawing details &amp; as Directed The working top shall be made out of 18 mm thk ply of MR grade of ISI mark confirming to IS-303 1st Quality of approved Make &amp; brand and finished With 1.00 mm thk laminate of approved brand, shade &amp; colour at every counter as shown in design &amp; drawing including 10 mm thick vertical glass In front face over counter top of required height if any, with necessary etching &amp; edge polishing, etc. All the inner exposed faces shall be finished in 0.8 mm thick laminate of required shade and all internal hidden faces except the bottom of the drawer shall be finished with french spirit polish in three coats with finishing, carting,erection etc.complete.</p> | 2.00 |  | No.  |  |
| 9 | <p><b>CASH CABIN COUNTER</b><br/> Providing &amp; fixing banking Cash Counter (1500 to 1830 mm) as per drawing &amp; design with total height of 1200 mm out of which the height of working top is up to 750 &amp; the upper portion with 450 mm in height from working top and glass top of required width and as per detailed drawing and as directed. the total structure of the counter shall be made out of 18 mm thick ply of MR Grade of ISI mark confirming to IS-303 of approved make &amp; brand and finished with 1.0 mm thk laminate sheets of approved brand, shade &amp; colour as per design and drawing and of approved shade as Directed by the Architect, including T.W. Moulding, beading of</p>   | 1.00 |  | Nos. |  |

|     |   |      |     |      |     |
|-----|---|------|-----|------|-----|
|     | <p>required size at required positions and design for exposed edge of counters at top. <b>Three equal Drawers</b> below table top shall be Provided including fitting and fixtures Godrej/hettich /ozone Locks(concealed) to all drawers, Powder Coated handles, Ebco drawers, Sliders (Telescopic) etc. one sliding keyboard of required size shall be provided with locking arrangement made out of 18 mm thick ply of MR Grade of ISI mark confirming to IS-303 of approved make &amp; brand with top surface laminated with 1.0 mm thk laminate of approved brand, shade &amp; colour All inner exposed surfaces shall be finished in 0.8 mm thick laminate of required shade and all internal hidden faces except the bottom of the drawer shall be finished with french spirit polish in three coats with finishing, carting, erection etc. complete.</p>   |      |     |      |     |
| 10  | <p><b><u>OFFICER'S TABLE WITHOUT DRAWER</u></b><br/> Providing officer's Table of required size as per design, drawing and as directed made out of 18 mm thick MR Grade ply of I.S.I. Mark confirming to IS-303 of approved make &amp; brand &amp; finished with 1.0mm thick laminate in multicolour of approved brand, shade &amp; colour on the outer &amp; top surfaces as per design &amp; as directed by the Architect. Arrangement for CPU and keyboard is to be made as per design and as directed with necessary arrangement for computer casing required inclusive of C.P. Finished Brass fittings, hinges &amp; Keyboard Sliding channels (telescopic), handles etc. complete. All inner exposed Surface finished in 0.8 mm thick laminate of required shade and all internal hidden faces shall be finished with french spirit polish in three coats with finishing, carting, erection etc. Complete. <b>The work shall be inclusive of 10 mm thick glass above table top.</b></p>   | ---  | --- | ---  | --- |
| 10A | <p><b><u>OFFICER'S TABLE WITH DRAWERS</u></b><br/> Providing officer's Table of required size (1200 to 1650 mm) &amp; as per design, drawing with drawer unit consisting of One No. Drawer and one openable shutter below with removable mid-shelf , footrest &amp; CPU arrangement is to be made out of 18mm thick ply of MR Grade of ISI mark confirming to IS-303 of approved make &amp; brand and finished with 1.0 mm thick Laminate of approved brand, shade &amp; colour on exposed outer Surfaces . One key board arrangement is to be made in the table and necessary arrangement for computer casing if required inclusive of Brass fittings, hinges, Godrej/hettich/ozone locks (concealed) to all drawers and shelf , Powder coated handle, Ebco drawers sliders (Telescopic) And Keyboard channels, handles etc. complete. All internal exposed surfaces shall be finished in 0.8 mm thick laminate &amp; all inside hidden faces except the bottom of the drawer shall be finished with French spirit polish in two or more coats with finishing , carting, erection including T.W. Beading required for table etc. Complete. <b>The work shall be inclusive of 10 mm thick glass above table top</b></p> | 3.00 |     | Nos. |     |

|     |  |      |     |       |     |
|-----|--|------|-----|-------|-----|
| 10B | <p><b>Officer Table's Side Rack</b><br/> Providing and fixing Side table /rack of size or of required size 900 to 1100 x400x750 mm in height in Officer's Table as per design, drawing and as directed of I.S.I. Mark confirming to IS-303 1st quality of approved make &amp; brand and finished with 1.0 mm thick laminate of approved brand, shade &amp; Colour (as approved by Bank's architect/competent authority.) sheet of approved shade by Architect with provision of drawers and below it storage cabinet with openable shutters/ sliding shutters, powder coated handle, Ebco drawers sliders (telescopic), etc complete as directed. All Internal exposed surfaces shall be finished in 0.8mm thick laminate and all inside hidden faces except the bottom of the drawer shall be finished with french spirit polish in three coats with finishing, carting, erection and including T.W. Beading required for table etc. complete.</p>  | ---  | --- | ---   | --- |
| 11  | <p><b>CASH CABIN PARTITIONS</b><br/> Providing &amp; fixing 50 mm thick partly glazed/grilled and partly panelled partition for Cash cabin up to required height over banking counters as directed by Architect, made out of framework of standard rectangular section (40 X 40mm X 1.20 mm Thickness) of size 600 X400 mm c/c covered with 6 mm thick ply on both faces of MR grade of ISI mark confirming to IS-303 of approved make &amp; brand on both sides finished with 1.0 mm thick laminate of approved brand, shade &amp; colour in Multi-colour of approved shade &amp; colour up to height of 1200 mm from floor. Powder coated Al. Grill (Decogrille/202 )in Approved shade &amp; colour shall be provided above 1200mm up to Required ht.(900mm approx. )fixed with MDF/Al. Beading of required size on both sides with provision of tray 230x300 mm of size in the cash cabin as per design &amp; drawing and as directed by Architect. <b>(Door item taken separately)</b>. All the exposed faces of the wood and MDF Beading shall be finished with 1 st quality Duco Paint of approved shade and as directed by the Architect.</p> | 7.50 |     | Sqmt. |     |
| 12  | <p><b>PARTITION OVER CASH CABIN (FRONT PORTION)</b><br/> Providing &amp; Fixing 10mm thick Glazed partition with necessary etching &amp; edge polishing wherever required over Cash Counters made out of Hard wood frame work of size 30mmx50mm having height of 800mm or of required size (glass height) with necessary MDF beading on both sides &amp; T.W. patta at top, having an opening slit above the height of 300mm as per design and drawing and as directed by the Architect. The Glass is to be properly grinded and edge polished wherever the edges are exposed. For panelled portion upto required height made out of framework of standard Aluminium rectangular section (40 X 40mm X 1.20 mm Thickness) of size 600 X400</p>  | 4.00 |     | Sqmt. |     |

|    |  |      |  |       |  |
|----|--|------|--|-------|--|
|    | mm c/c covered with 6 mm thick MR Grade Plywood of I.S.I. Mark confirming to IS-303 of approved make & brand on both sides & finishing with 1.00mm thk laminate of approved brand, shade & colour as directed by Architect. All the exposed faces of the Wood and MDF Beading shall be finished with 1 st quality Duco Paint of approved shade and as directed by the Architect.   |      |  |       |  |
| 13 | <p><b>COUNTER TABLE SIDE PARTITIONS</b></p> <p>Providing &amp; fixing partly glazed and partly panelled partition 50mm thick (Overall thickness) for counter Tables up to required height (1.50 mts approx).made out of Framework of standard Aluminium rectangular Section (40 X 40mm X 1.20mmThickness) of size 600 X400 mm c/c covered with 6 mm thick ply of MR grade of ISI mark confirming to IS -303 of approved Make &amp; brand on both sides finished with 1.00mm thick laminate of approved Brand, shade &amp; colour of approved shade and design upto height of 1000mm From floor level and the glazed upper portion shall be as per design &amp; drawing with 10mm thick Glass (machine polished edge) with necessary etching work fixed with MDF beading of size 25x12mm or as per drawing and design and as directed by the Architect. Including all fittings, fixtures etc. complete. The partition shall have opening of required size for the provision of glass tray. The glass tray of size 230x100 mm is provided at the height of 900mm, including all fittings, fixtures, beading etc. complete. All the exposed surfaces of glass i.e. edge are properly grinded, bevelled and polished. All the exposed surfaces of Hardwood and MDF beading shall be finished with wooden polish or 1 st quality Duco Paint of approved shade and as directed by the Architect.</p> | 8.50 |  | Sqmt. |  |
| 14 | <p><b>PARTLY GLAZED AND PARTLY PANELLED PARTITION – LOW HEIGHT</b></p> <p>Providing &amp; Fixing low height partly glazed and Partly panelled partition at required place of Required Height (1.50Mts height approx.) as per drawing and as directed by the Architect.(Glazed portion at required place) as per design and drawing made out of Framework of standard Aluminium rectangular section (40 X 40mm X 1.20 mm Thickness) of size 600 X400 mm c/c covered with 6mm thick ply of MR Grade of ISI Mark confirming to IS-303 of approved make &amp; brand on both sides &amp; finished with 1.00mm thk laminate of approved brand, shade &amp; colour of approved shade &amp; design on both side of partition. The glazed portion shall be 10 mm thick clear float glass fixed with MDF beading of required size glass brackets on inner side of the partition. All the exposed faces of hard wood and T.W. Beading shall be finished with wooden polish or 1 st quality Duco Paint of approved shade and as directed by the Architect. The overall thickness of the partition shall be 50mm.</p>   | 2.00 |  | Sqmt. |  |

|    |   |       |  |       |  |
|----|---|-------|--|-------|--|
| 15 | <p><b><u>FULL HEIGHT FULLY PANELLED/PARTLY GLAZED AND PARTLY PANELLED PARTITION</u></b><br/> Providing &amp; Fixing full height Fully paneled partition at required positions / Places of required height (2.25 Mts or as directed ) as per drawing and as directed by the Architect (Glazed portion at required places) as per Design and drawing made out of Framework of standard Aluminium rectangular section (50 X 50 X 1.20 mm thickness) of size 600 X 400 mm c/c covered with 12mm thick ply of MR Grade of ISI Mark confirming to IS-303 to IS-303Silver of approved make &amp; brand both sides &amp; finished with 1.00mm thk Laminate of approved brand, shade &amp; colour and design on both side of partition. as directed fixed with MDF beading of required size on inner side of the partition. All the exposed faces of hard wood and MDF beading shall be finished with wooden polish or 1 st quality Duco Paint of approved shade and as directed by the Architect. The overall thickness of the partition shall be 75mm.</p> | 27.50 |  | Sqmt. |  |
| 16 | <p><b><u>CABIN DOORS</u></b><br/> Providing and fixing partly glazed and partly panelled door (<b>overall thickness min. 50mm shutter</b>) at required positions and as directed the door shall be made out of framework of standard Aluminium rectangular section (40X40mmX1.20mmThickness) of Required size, Covered with 6mm thick ply of MR grade of ISI mark confirming to IS-303 1st quality of approved make &amp; brand on both sides &amp; finished with 1.00mm thick <b>laminat</b>e of approved Brand, shade &amp; colour as directed by Architect. The Upper portion of the shutter shall have 5 mm thick glass panel above 900 mm or as directed from floor level with necessary itching &amp; with T.W. Beading of size 25x12mm. The shutter have Brass Hinges, Night latch of Godrej Make /Aldrops as per requirement, Brass Tower Bolt 150mm long, Brass Handle 100 mm, Door Stopper with Erection, finishing etc. complete and as directed by Architect.</p>   | 8.00  |  | Sqmt. |  |
| 17 | <p><b><u>CUSTOMER'S WRITING TOP / WRITING DESK</u></b><br/> Providing &amp; fixing Writing top for Customers of required size as per design and drawing made out of 18 mm thk commercial ply frame of MR grade of ISI mark confirming to to IS-303 1st Quality of approved make &amp; brand 1st Quality / Europly - 1st quality or equivalent finished with 1.0mm thick Laminate and 12 mm thick Glass top with the divisions to be fixed into the frame for keeping Slips /voucher etc. as per drawing and as directed by the Architect.</p>   | 1.00  |  | No.   |  |
| 18 | <p><b><u>DOOR CLOSER</u></b><br/> Providing &amp; fixing door closer to doors of Dorma make /Godrej heavy only, inclusive of fixing, finishing etc. complete.</p>   | 3.00  |  | Nos.  |  |

|    |  |       |  |       |  |
|----|--|-------|--|-------|--|
| 19 | <b><u>FLOOR SPRING:</u></b><br>Providing & fixing floor spring to doors of Godrej make D100 floor spring (100kg) or equivalent Ozone/Dorma make of I.S.I mark.   | 2.00  |  | No.   |  |
| 20 | <b><u>GRANITE TOP</u></b><br>Providing & fixing Granite Top over Counter table and cash cabins of 0.30m width in Cash cabins and 0.20m width in CTO counter or as per drawing and design in the waiting/ public area, and wherever required as directed fixed over plywood table working top with araldite /epoxy materials ( resin+hardners) including full round moulding, fixing, finishing etc. Complete.  | 2.00  |  | Sqmt. |  |
| 21 | <b><u>STORAGE RACK (Full Height)</u></b><br>Providing & fixing storage rack of required height (2.25 mt or above or as required) at required position made out of 18mm thick MR Grade ply of I.S.I. mark confirming to IS-303 of approved make & brand with 1.0mm thick laminate of approved brand, shade & colour As per drawing and as directed by Architect. The frame shall be made out of 18mm thk. MR Grade ply confirming to I.S. 303 of approved make & brand finished with 1.0mm thick laminate of approved brand, Shade & colour as per drawing and as directed by Architect. The shutters shall have overall thickness of 25 mm made out of 12mm thick MR grade ply ISI mark confirming to I.S.I 303 of approved make & brand Shutter Framework shall be made out of size 75mmx12mm and 6mm thk ply pressed on both sides To have thickness of 25 mm with T.W. Beading on edges of shutters finished with 1.0 mm thk. Laminate of approved brand, shade & colour in multicolour as per design and drawing and of approved shade and colour on external face. All internal shelves made out of 12 mm thk MR Grade ply and finished with 0.8 mm thick laminate on top side & including all internal surfaces but excluding hidden faces. Shutters shall have C.P. Finished Brass hinges with ball catchers, magnetic catchers, brass screws with finishing, erection etc. Complete. | 13.50 |  | Sqmt. |  |
| 22 | <b><u>STORAGE RACK (low Height)</u></b><br>Providing & fixing storage rack of required height (1.00 mt or as required) at required position made out of 18mm thick MR Grade ply of I.S.I. Mark confirming to IS-303 of approved make & brand finished With 1.00 mm thick laminate of approved brand, shade & colour As per drawing and as directed by Architect. The frame shall be made out of 18mm thk. MR Grade ply confirming to I.S. 303 of approved make & brand finished with 1.0mm thick laminate of approved brand, shade & colour as per drawing and as directed by Architect. The Lamination work in 1.00 mm Thick laminate to be executed on both sides wherever required to the exposed surfaces of storage rack. The shutters shall have overall thickness of 20 mm made out of 18mm thick MR grade ply ISI mark   | 16.00 |  | Sqmt. |  |

|    |   |        |  |       |  |
|----|---|--------|--|-------|--|
|    | confirming to I.S.I 303 of approved make & brand<br>Beading on edges of shutters finished with 1.0 mm thk.<br>Laminate of approved brand, shade & colour in<br>multicolour as per design and drawing and of<br>approved shade and colour on external face. All<br>internal shelves made out of 12 mm thk MR Grade<br>ply and finished with 0.8 mm thick laminate on top side<br>& including all internal surfaces but excluding hidden<br>faces. Shutters should have C.P. Finished Brass<br>hinges with ball catchers, magnetic catchers, brass<br>screws with finishing, erection etc. complete.  |        |  |       |  |
| 23 | <b>ALUMINIUM COMPOSITE PANELLING at Chajja/ Entrance</b><br>Providing & fixing in required position 3 mm thk.<br>exterior grade aluminium composite panel<br>in ceiling & vertical cladding or as per requirement<br>and directed by the Architect in Composite panel of Metallic<br>Exterior grade of Aludecor/ Alto bond/equivalent make,<br>over a frame work made out of 50x25x1.20mm or as required<br>and as directed aluminium SHS anchored to existing<br>(M.S. Structure if any) Structure including installing the<br>composite panel in a grid pattern of size 2'-0" x2'-0"<br>(approx) or of <b>required size</b> as directed with<br>the help of aluminium cleats / angle of size<br>1"x1" and striking out the joints with weather<br>silicon of dow corning 789/wacker make<br>and as directed by the bank's Architect.<br>The rate shall include cutting of panels, its<br>bending cutting for providing down-lighters<br>etc. labour, scaffolding etc. complete. | 40.00  |  | Sqmt  |  |
| 24 | <b>VERTICAL BLINDS</b><br>Providing & fixing vertical blinds 100 mm wide of Vista<br>levolor/ Aerolux make of approved shade including<br>C-channel and inclusive of necessary fixtures, fixing,<br>finishing etc. complete.  | 11.50  |  | Sqmt. |  |
| 25 | <b>R.S. Boxing Internal</b><br>Providing and fixing panelling to Columns/walls<br>or wherever required as directed with<br>12mm thick ply of MR grade of standard make<br>Confirming to IS-303 <b>1st quality</b> of approved make &<br>Brand finished with 1.0mm thick Laminate finished with<br>Approved make , brand, design and colour as directed<br>by the Architect. The rate shall be inclusive of work in T.W.<br>Members/ aluminium sections to bring the surface/work in<br>true lines and level in Multicolour Laminates, grooves. All<br>Necessary hardware, tools and plants required for the work<br>to make to the column/wall surfaces in true line and level.   | 62.00  |  | Sqmt. |  |
| 26 | <b>ACRYLIC EMULSION PAINTING</b><br>Providing and applying direct plastic emulsion paint of approved<br>quality, and shade to old and new surfaces in two or three<br>coats including scaffolding with touch up putty .(including<br>the primer coat) etc. including scaffolding,finishing etc. Complete  | 130.00 |  | Sqmt  |  |

|     |   |        |     |       |     |
|-----|---|--------|-----|-------|-----|
| 26a | Providing and applying two coats of wall care putty on old / new plastered surfaces and ceiling and walls to prepare Surface even and smooth of approved make including scaffolding,finishing etc. Complete   | 130.00 |     | Sqmt  |     |
| 27  | <b>FULL HEIGHT PARTITION INCLUSIVE OF WINDOWS</b><br>Providing & Fixing Full height partly glazed and Partly panelled partition with window at required Positions of required height or as required, as per drawing, design and as directed by the made out of (Glazed portion at required places) framework of standard Aluminium rectangular Section (50 X 50mm X 1.20mm Thickness) of size 600 X600 mm c/c covered with 12 mm thick ply of MR Grade of ISI mark confirming to IS-303 of approved make & brand on both sides & finished with 1.00 mm thk Laminate of approved make, brand, shade and design on both side of partition. The glazed windows shall be made out of framework of Standard aluminium rectangular section (2 Track Sliding window) (50 X 50mm X 1.20mm Thickness) or of required sizes, partition covered with 12mm thick ply of MR grade partition covered with 12mm thick ply of MR grade of ISI mark confirming to IS-303 of approved make & brand on both sides & finished with 1.00mm thick laminate of approved make, brand, shade & colour as directed by Architect. The overall thickness of the partition shall be minimum 75mm. The work includes Aluminium glazed sliding windows at required places, if any in fixed partition / Entrance partition as per drawing & as directed by Architect. | 8.00   |     | Sqmt. |     |
| 28  | Providing & Fixing/ laying 10mm thick Glass at various places with necessary etching & edge polishing wherever required and as directed by Architect  | 3.00   |     | Sqmt  |     |
| 28A | <b>Shutter Above Loft:</b> Providing and fixing framework made out of plywood frame work of 12mm thick ply x 2 nos and 6 mm ply fixed from both sides( overall thickness 38 mm including lamination) Confirming to IS-303 1st quality Greenply (Green MR)/ Century ply (Silver)/ Kitply (Swastik plus) ). The shutters shall have overall thickness of 25 mm made out of 12mm thick MR grade ply ISI mark Confirming to IS-303 1st quality Greenply (Green MR)/ Century ply (Silver)/ Kitply (Swastik plus) Shutter Framework shall be made out of size 75mmx12mm and 6mm thk ply pressed on both sides to have thickness of 25 mm with T.W. Beading on edges of shutters finished with 1.0 mm thk. Laminate (Merino/ Sunmica/Formica/Royal Touch or equivalent) in multicolour as per design and drawing and of approved shade and colour on external face. All internal shelves made out of 12 mm thk MR Grade ply and finished with 0.8 mm thick laminate & including all internal surfaces of cupboard/storage, shutters, shelves but excluding hidden faces. Shutters should have Brass hinges with ball catchers, magnetic, brass screws, etc. complete.  | ---    | --- | ---   | --- |
|     | <b>Total</b>  |        |     |       |     |

Signature & Seal of Contractor

Regional Head

Nagpur Region, Central Bank Of India,  
Oriental Building, Second Floor,  
LIC Square, Station Road, Nagpur(M.S)

**APPROVED MAKE OF MATERIALS**

| <b>SR. NO.</b> | <b>ITEM / MATERIAL</b>                 | <b>MAKE</b>  |
|----------------|--|--|
| 1              | Particle Board                         | -----  |
| 2              | Antitermite / Fire retardant Paint     | -----  |
| 3              | False Ceiling                          | Amstrong make or equivalent subject to prior approval from Organization's Competent Authorities.   |
| 4              | Oil Bound Distemper / Acrylic Emulsion | Asian, Dulux, Berger   |
| 5              | Laminate                               | (Royal Touch: or Sunmica/ Aica / Formica : or Merinolam ) in Multi-colour<br>Aica :- Highland Pine : 1996<br>Aica:- Sapphire Blue: 1452<br>Aica:- Red : 1566 |
| 6              | Teak Wood                              | C.P. Teakwood  |
| 7              | Hardware                               | -----  |
| 8              | Tile                                   | -----  |
| 9              | Leatherite                             | -----  |
| 10             | Glass                                  | Modi float / Asahi / St. Gobain  |
| 11             | Ply                                    | MR Grade – 303 ISI (1st quality Greenply(Green MR)/ Century ply (Century Win)/ Kitply (Swastik Plus) )   |
| 12             | Vinyle Film                            | -----  |
| 13             | Board                                  | -----  |
| 14             | Carpet                                 | -----  |
| 15             | External Cement Paint                  | Weather Shield (Dulux) or equivalent subject to prior approval from Bank's Competent Authorities.  |
| 16             | Cement                                 | -----  |
| 17             | GI Pipe                                | -----  |
| 18             | Paint                                  | Dulux / Berger / Asian Synthetic Enamel Paint First Quality  |
| 19             | CP Fitting                             | -----  |
| 20             | Ceramic Fitting                        | -----  |
| 21             | Kitchen Sink                           | -----  |
| 22             | Vitrified Tiles                        | -----  |
| 23             | Aluminium Section                      | For Aluminium sliding window and doors: Jindal ISI<br>For Partitions : 1.20 mm thk standard Aluminium pipe Section   |
| 24             | Flush Door Shutter                     | -----  |
| 25             | Glue                                   | -----  |
| 26             | Gypboard False Ceiling                 | Manufactured by Gypsum india Pvt. Ltd make or equivalent subject to prior approval from Organization's Competent Authorities.                                |
| 27             | Venetian Blinds                        | Vista levolor/ Aerolux make or equivalent subject to prior approval from Bank's Competent Authorities.   |
| 28             | Door Closer                            | Ozone/ Dorma/ Godrej make heavy duty   |
| 29             | Floor Spring                           | Godrej make D100 Floor Spring (100 Kg.) or equivalent Ozone/ Dorma make  |
| 30             | Melamine Polish                        | -----  |
| 31             | Wax polish                             | -----  |
| 32             | U – Foam                               | -----  |
| 33             | Fabric                                 | -----  |
| 34             | Locks                                  | Godrej make only   |
| 35             | Metallic Laminate                      | -----  |
| 36             | CPU Trolley                            | Made by 18 mm plywood  |
| 37             | Keyboard tray with                     | Made by 18 mm plywood  |

**Signature & Seal of Contractor**

**TENDER**

**ANNEXURE- B**

**ELECTRIFICATION WORKS**

**NAME OF WORK : TENDER FOR ELECTRIFICATION WORKS TO BE EXECUTED FOR  
NANDANVAN BRANCH, CENTRAL BANK OF INDIA, NAGPUR (MS)**

**NAME OF CONTRACTOR**

| Item | Description  | Quantity | Rate    | Per  | Amount  |
|------|--|----------|---------|------|---------|
|      |  |          | Rs. Ps. |      | Rs. Ps. |
| 1    | <b>ELECTRICAL</b><br><b>Supplying, installation testing and</b><br>commissioning of machine pressed powder coated panel board with locking arrangements as Main Distribution board (Panel Board with shutters ) in size (1.00 x 1.50 Approx.or as required) 35/5 Angle Iron & made out 18 SWG CRCA sheet approved shade including fixing, finishing, etc. Complete   | 1.00     |         | No.  |         |
| 2    | <b>BUS BAR</b><br>Providing & fixing Bus Bar of approved make and quality of 100 Amp. With enclosure in panel board including all Lugs, Cable crimping, fixing and inclusive of all connections etc. complete. (Ashoka make)   | 2.00     |         | No.  |         |
| 3    | Providing, laying & termination of 50.00 Sqmm x 3 1/2 core armoured aluminium cable of I.S.I.make (Aluminium Conductor Heavy Duty 1100 V Grade Cables) with 2 run of 8 SWG G.I. Earthing wire connected from pole to Meter panel board to Bus bar and upto Main Electrical Distribution Board overhead open or above False ceiling fixed with saddle & screws Including fixing commissioning etc Complete. (RR Kabel/ Anchor/ Polycab Cable make only)                       | 30.00    |         | Rmt. |         |
| 4    | Providing, laying & termination of 35.00 Sqmm x 3 1/2 core Aluminium Armoured cable of I.S.I. Make (Aluminium Conductor Heavy Duty 1100 V Grade Cables) with 2 Run of 8 SWG GI earthing wire connected with suitable Glanel & Lugs from Pole to Meter as per requirement and Bus bar to Main Electrical Distribution Board overhead open or above False ceiling fixed with saddle & screws Including fixing commissioning etc Complete. (RR Cable/ Anchor/Polycab make only) | 20.00    |         | Rmt. |         |
| 5    | Providing, laying & termination of 16.00 Sqmm x 4 core Aluminium Armoured cable of I.S.I. Make (Aluminium Conductor Heavy Duty 1100 V Grade Cables) with 2 Run of 8 SWG GI earthing wire connected with suitable Glanel & Lugs from Panel board to UPS room as per requirement and Meter to panel board overhead open or above False ceiling fixed with saddle & screws Including fixing commissioning etc Complete. (RR Cable/ Anchor/Polycab make only)                    | 30.00    |         | Rmt. |         |

|     |   |        |  |      |  |
|-----|---|--------|--|------|--|
| 6   | Dedicated Earthing by using 600 mm x 3 mm thk. Copper plate with reveting and nut bolting 25 x 3 mm copper strip 3.00 mt. (approx.) From earth pit to wall surface and 50 kg Charcoal and excavation of hard concrete surface refilling of soil and replastering Earthing must have waterproofing arrangement with funnel and stop cock (For UPS.)  | 1.00   |  | No.  |  |
| 6a  | From earthing to main distribution board (copper strip running)   | 5.00   |  | Rmt. |  |
| 6b  | From earthing to main distribution board (copper wire )   | 20.00  |  | Rmt. |  |
| 7   | Providing & fixing call bell points wiring by Using 1.5 sq.mm x 2 wire along with dingdong bell and 2 mm thk 25 mm dia conduits pipe concealed/ open rigid PVC truncking, as directed, including bend, tee of Precision make only.  | 2.00   |  | No.  |  |
| 8   | Providing and fixing of ceiling fan down Rod & industrial tube light down Rod from 0.75 mt. To 2.00 mt. G.I.pipe with clamp nut bolt etc. complete.   | 15.00  |  | No.  |  |
| 9   | Providing and fixing of Twin Anchor Bolt for ceiling fan including fixing etc. complete.  | 15.00  |  | No.  |  |
| 10  | <b>GENERAL WIRING FOR LIGHTS/FAN /PLUG POINTS etc.</b><br>Providing & fixing Light points wiring by using 1.5sq.mm. X 2 wire in P.V.C. 2Mm thk. 25 mm dia conduits pipes accessories/conduit pipe/open rigid P.V.C.truncking, as directed, including bend, tee of Precision make only (RR Kabel/ Anchor/Polycab) <b>wherever required as per the directions of the Architect.</b><br>Note: All electrical points in modular switches and Sockets including modular plate of required size & <b>Legrand Mylinc Make Only</b> | 65.00  |  | No.  |  |
| 10a | Providing and fixing of 6A plug points by using 1.5sq.mm. X 2 Wires along with earthing wire and 2 mm thk 25 mm dia conduits pipe concealed / open rigid PVC truncking, as directed, including bend, tee of precision make with <b>Legrand Mylinc make only wherever required as per the directions of the Architect.</b>   | 10.00  |  | No.  |  |
| 11  | Providing and fixing of sub main wiring by using 2.5 sq.mm x 2wires + 1.5 sq.mm x 1 wire as an earth along with 2 mm Thk 25 mm dia PVC pipe concealed/ open rigid PVC truncking, as directed, including bend , tee of Precision/ Vasan's make only from main distribution to switch board as per load distribution (RR Cable/ Anchor/ Polycab make only)  | 280.00 |  | Rmt. |  |

|     |   |        |  |      |  |
|-----|---|--------|--|------|--|
| 12  | Providing & fixing sub main wiring by using 1.5 x 2 wires + 1.5 Sq.mm x 1 wire as an earth along with 2 mm thk 25 mm dia PVC pipe concealed/ open rigid PVC trunking, as directed including bend, tee of Vasan's/ Precision make only from switch board to light points (RR Kabel/ Anchor/Polycab make only)                        | 270.00 |  | Rmt. |  |
| 13  | Providing & fixing circuit wiring for inverter from lighting switch board.  | 150.00 |  | Rmt. |  |
| 14  | Telephone points : Providing & fixing of telephone point with 4 pair telephone cable with 2mm thick 25 mm dia concealed/ open rigid PVC trunking, as directed, & jack type socket on Hylum sheet & suitable M.S.Box.  | 9.00   |  | No.  |  |
| 15  | <b>TELEPHONE BOX</b><br>Supply & erection of 20/50 pair MDF krone Connector box or telephone tag block housed in suitable powder coated box with lock and key arrangement including 20/50 pair krone make connector   | 1.00   |  | No.  |  |
| 15a | Providing & fixing of running circuits wiring for telephone point from EPBAX to telephone points with 4 pair telephone cable with 2 mm thk 25 mm dia concealed/open rigid PVC trunking, as directed complete.   | 180.00 |  | Rmt. |  |
| 16  | Providing & fixing 15 Amp for Cooler/printer/ Raw Power Point Switch & socket combined, fixed on M.S box conduits pipe concealed / open rigid PVC trunking, as directed, including bend, tee of precision make with <b>Legrand Mylinc Model</b> make only <b>wherever required as directed by Architect.</b>                        | 12.00  |  | Nos. |  |
| 16a | Providing and fixing of 6/ 15A plug points by using 1.5sq.mm. X 2 Wires along with earthing wire and 2 mm thk 25 mm dia conduits pipe concealed / open rigid PVC trunking, as directed, including bend, tee of precision make with <b>Legrand Mylink</b> make only <b>wherever required as per the directions of the Architect.</b> | 5.00   |  | No.  |  |
| 17  | Providing and fixing 4 Sq.mm x2 wire + 2.5 Sq.mm x1 wire from Distribution along With 1" PVC concealed pipe 1.5 mm thick fixed on industrial saddle if in false ceiling or concealed PVC pipe (pipe of Diamound/ Precision make only & wires of (RR Kabel/Anchor/Polycab only) (Cooler/ Power Point)                                | 120.00 |  | Rmt. |  |
| 17a | Providing , fixing & commissioining of 4 sq.mm x 4 core copper cable for AC Out Door Unit including suitable glands and lugs Including fixing commissioining etc Complete. (RR Kabel/ Anchor/Polycab make only)   | 40.00  |  | Rmt. |  |
| 18  | Labour Charges for fixing the following items:  |        |  |      |  |
| a   | CEILING FANS  | 15.00  |  | No.  |  |
| b   | LED 36 W SQ. PANEL(600X600)   | 12.00  |  | No.  |  |
| c   | LED 15 W CONCEALED  | 32.00  |  | No.  |  |
| d   | GARNET 20 WATT  | 8.00   |  | No.  |  |
| e   | EXHAUST FANS  | 3.00   |  | No.  |  |
| f   | WALL MOUNTED FAN  | 1.00   |  | No.  |  |

|     | <b>LIGHTING FIXTURES</b>   |       |  |     |  |
|-----|--|-------|--|-----|--|
| 19  | Providing & fixing 125 Amp MCCB with Enclosure on Panel board including installation, wiring, crimping etc complete. (MCCB and enclosure of Legrand make only)   | 1.00  |  | No. |  |
| 19a | Providing & fixing 125 Amp MCCB with Enclosure at entrance including installation, wiring, crimping etc complete. (Legrand make only Including enclosure) for single switch system & arrangement for indicator light outside in front of Bank entrance.  | 1.00  |  | No. |  |
| 19b | Providing & fixing Indicator enclosure box with R,Y,B LED Indicator including installation, wiring, crimping etc complete. For Single Switching only   | 1.00  |  | No. |  |
| 20  | Providing & fixing 63 Amp. 4 pole Lexic MCB with Enclosure ( Legrand make only) for UPS incomer and for Inverter including commissioning, installation etc. complete   | 2.00  |  | No. |  |
| 21  | Providing & fixing 2 No. 40 Amp Dipole MCB's For input & output of UPS circuits & 2 No.40 Amp Dipole MCB with enclosure for Inverter Input and Output including commissioning, installation etc. complete (MCB's including enclosure Legrand make only)  | 4.00  |  | No. |  |
| 22  | Providing & fixing ETPN DB (with shutter) Distribution Box 6-way IP 43 with 63 Amp. 4 pole lexic MCB For Electrical Circuits with Integrated Label holder including installation, wiring, crimping etc.complete. (Legrand make only.)  | 1.00  |  | No. |  |
| 22a | Providing & fixing ETPN DB (with shutter) Distribution Box 4-way IP 43 with 63 Amp. 4 pole lexic MCB For AC Circuits with Integrated Label holder including installation, wiring, crimping etc.complete. (Legrand make only.)  | 1.00  |  | No. |  |
| 23  | <b>Lighting circuit Wiring:</b> Providing & fixing 10A/16A/25A/SPMCB with cover for electrical circuits and for AC/ Cooler point/Power point single pole including, crimping wiring, installation for electrical Output along with (Legrand make only) For I/P Circuits with lable holder etc. complete. | 22.00 |  | No. |  |
| 24  | Providing & fixing step down Fan Regulator with necessary fixtures etc. complete. (Legrand make only.)   | 15.00 |  | No. |  |
| 25  | Providing & fixing 63 Amp Three phase main switch ISI Make (Ashoka or equivalent) with 63 Amp /500 V porcelain Kit-Kat for MSEB meter Connections, including commissioning, Installation etc. complete.  | 1.00  |  | No. |  |

|    | <b>LIGHTING ACCESSORIES</b>   |        |  |      |  |
|----|---|--------|--|------|--|
| 26 | Providing Ceiling Fans of approved make (Bajaj EDGE HS NEO DECO Or as directed By Architect ) of 1200mm /920mm Swipe without electronic regulator Assembly, etc. complete.  | 15.00  |  | Nos. |  |
| 27 | Supply and Installation of 450mm Sweep Wall Fan ( Metal Body only )Armstrong / Almonard Make with labour charges, etc. complete.  | 1.00   |  | Nos. |  |
| 28 | Providing recess mounted LED Square Panel 36 watt (600x600) Lighter Immaculate CRCO10 Of approved make Wipro/Philips /Bajaj make equivalent Model No. CRCO10RO38HP57  | 12.00  |  | Nos. |  |
| 29 | Providing recess mounted LED Square Panel 15 watt (150x150) Lighter SquarisLED CRDL15 Of approved make Wipro/Philips /Bajaj make equivalent Model No. CRDL15R015HP60  | 32.00  |  | Nos. |  |
| 30 | Providing & fixing LED tubelight Garnet wipro make 20 w @ required places & as directed or equivalent including tube rods etc. Complete.  | 8.00   |  | Nos. |  |
| 31 | Providing 12" Exhaust fans (Alstorm/Crompton /Bajaj/ Almonard or equivalent) make along with necessary ply framework including fixing etc. complete.  | 3.00   |  | Nos. |  |
| 32 | <b>WIRING FOR AIR-CONDITIONER</b><br>Providing and fixing 20A Plug and socket (Legrand make) with 25A SPMCB with modular plate & box for indoor Cassette/ wall hung AC including 4 Sq.mm x2 wire +2.5 Sq.mm x1 wire along With 1" PVC concealed pipe 1.5 mm thick fixed on industrial saddle if in false ceiling or concealed PVC pipe (pipe of Diamound/ Precision make only & wires of (RR Kabel/ Anchor/Polycab only) and as directed. | 5.00   |  | No.  |  |
| 33 | Providing and Fixing 3+1,0.6 mm,14/38 Coxial Cable / Cat-6 cable / RG-6 plus power cable from IP/ HD camera to 4U Rack in Concealed/Open 25mm PVC Pipe, (ISI Marked) (make Network Gold or as Directed by Architect.) including cost of conduit for CCTV system in ceiling complete as directed.<br><b>(wiring only excluding cost of cameras and DVR/ NVR)</b>   | 160.00 |  | Rmt. |  |
| 34 | Providing & fixing of 2 pair wire music system wiring in 2 mm thk 25mm dia concealed/open rigid PVC trunking, as directed, including bend, tee of precision make only.  | 130.00 |  | Rmt. |  |
| 35 | Providing & fixing concealed speakers in false ceiling @ at ceiling of standard make Including necessary connections & fixing etc. complete.  | 6.00   |  | No.  |  |

|                                  |   |        |     |      |     |
|----------------------------------|---|--------|-----|------|-----|
| 35a                              | SITC of 120W amplifire with Zone separator Ahuja Make   | 1.00   |     | No.  |     |
| 36                               | Supplying and fixing of following sizes PVC insulated unarmoured copper conductor cable conforming to IS:1554 (Part-1) on surface/ concealed/ cable tray for connections indoor to outdoor unit completed etc. as reqd. 3 x 2.5 Sq. mm (as per BS EN 50288-7)   | 80     |     | Rmt  |     |
| 37                               | Dedicated Earthing by using 600x600 mm x 3 mm thk. G.I. plate with reveting and nut bolting 25 x 3 mm G.I. strip 10 mt. From earth pit to wall surface and 50 kg Charcoal and excavation of hard concrete surface refilling of soil and replastering Earthing must have waterproofing arrangement with funnel and stop cock (For Electrical.)   | 1.00   |     | No.  |     |
| 37 a                             | From earthing to Distribution board (G.I. strip running) (for electrification)  | 5.00   |     | Rmt. |     |
| 37 b                             | From earthing to Distribution board (G.I. wire ) (for electrification)  | 20.00  |     | Rmt. |     |
| 38                               | Providing & fixing 15/5 Amp. Switch socket combined, Concealed fittings (Legrand make) including fixing etc. complete.  | ---    | --- | ---  | --- |
| <b>COMPUTER SITE PREPARATION</b> |   |        |     |      |     |
| 39                               | Providing and fixing of 6 Sqmm x 2 wires +4.0 Sqmm x 1 wire for UPS O/P (from UPS to O/P Distribution from Electrical ETPNDB to Inverter/UPS (RR Cable/ Anchor/ Polycab make only)  | 35.00  |     | Rmt. |     |
| 40                               | Providing and fixing of 2.5 Sqmm X 2 wires + 1.5sq.mm x 1wire as sub mains from switch boards as per circuits 1 computer points = 1 circuits (RR Cable/ Anchor/Polycab make only)   | 320.00 |     | Rmt. |     |
| 41                               | Providing & fixing 4 Nos. 6A sockets <b>with one No. 15Amp. Control Switch above table top</b> along with 15/ 5 Amp switch & Socket fixed on concealed M.S.box or as required provided with suitable modular plate and making good the surface as required ( <b>Legrand Mylink</b> make)<br>Note: All electrical points in Legrand Mylink switches and Sockets including Legrand Mylink plate of required size of <b>Legrand Mylink make only</b> | 10.00  |     | Unit |     |
| 42                               | Providing & fixing SPN distribution box (with shutter) 12 way with 40 amp Dipole MCB for UPS for Input of UPS Circuits with integrated label holder including installation, wiring, crimping etc. Complete. Legrand Mylink make.  | 1.00   |     | No.  |     |
| 43                               | Providing & fixing 10A/16A/20A/25A SPMCB for UPS circuits single pole including crimping, wiring, installation for UPS output along with (Legrand Mylink) for I/P circuits with label holder etc. Complete.   | 10.00  |     | No.  |     |

|                               |   |        |     |      |     |
|-------------------------------|---|--------|-----|------|-----|
| 44                            | <b>AC Panel Board ( One Set )</b><br>Providing , installing and commissioning timer & 2 NO. Contactor With MCB's in AC Panel Board ; one no. Complete set at required position complete as directed by architect. | ---    | --- | ---  | --- |
| <b>[ I.T. RELATED ITEMS ]</b> |   |        |     |      |     |
| 45                            | Providing & fixing Lan cable <b>cat -6</b> along with 2 mm thk 25 mm dia PVC pipe concealed / open rigid PVC Trunking, as directed, including bend, tee, complete(Precision make only).                           | 320.00 |     | Rmt. |     |
| 46                            | <b>I.O.Box</b><br>Providing & fixing I.O.Box (D-Link make only) with necessary fixtures etc. Complete.  | 10.00  |     | No.  |     |
| 47                            | <b>1 Mt patch card</b><br>The work includes Providing , and commissioning of 1 Mt Patch Card of D- Link Only .  | 10.00  |     | No.  |     |
| 48                            | <b>2 Mt patch card</b><br>The work includes Providing , and commissioning of 2 Mt Patch Card of D- Link Only .  | 9.00   |     | No.  |     |
| 49                            | <b>24 Port Patch Panel</b><br>the work includes providing / fixing, installation and commissioning of 16 Port Patch panel of D-Link make only .   | 1.00   |     | No.  |     |
| 50                            | <b>24 Port Switch D- Link Make</b><br>the work includes providing /fixing, installation and commissioning of 16 Port Patch panel of D-Link make only .  | 1.00   |     | No.  |     |
| 51                            | Providing / fixing and instalation RJ 46 Connectors D- Link Only .  | 10.00  |     | No.  |     |
| 52                            | Providing & fixing new 9U HUB/ RACK in the new premiesies of the Branch including fixing etc. complete.   | 1.00   |     | No.  |     |
| <b>TOTAL</b>                  |   |        |     |      |     |

**Notes :**

1. All Wiring shall be done in Polycab/R.R. Kabel / Anchor wires only except otherwise mentioned in specification
2. All Conduit pipes over false ceiling shall be of Diamond / Precision/Vasan's make only.
3. All Casing caping for wiring shall be of Precision/Modi make only.
4. All MCB's, DB's, MCCB's ELMCB's, ELCB's shall be of Legrand/Hager/Siemens make only except otherwise mentioned in specifications.
5. All Switches & Stocks shall be of Legrand Mylinc make only.

6. All P.V.C. Pipes over false ceiling are to be fixed in ceiling with saddle & screws & no pipes shall be kept loose over false ceiling.
7. All wiring in walls are to be in conduit pipes ( if concealed) and shall be concealed in walls by making zari in walls with finishing, making surfaces good with cement mortar painting, if False ceiling work is executed. Wherever False ceiling item is not to be executed, open rigid PVC trunking system is to be adopted in ceiling and walls.

**Signature & Seal of Contractor**

**Regional Head**

Nagpur Region, Central Bank Of India,  
Oriental Building, Second Floor,  
LIC Square, Station Road,  
Nagpur(M.S)

ANNEXURE- C  
AIR- CONDITIONING WORK  
**BRANCH**

**NAME OF WORK : TENDER FOR PROVIDING SPLIT TYPE AIR CONDITIONING WORKS TO BE EXECUTED FOR PROPOSED NANDANVAN BRANCH, CENTRAL BANK OF INDIA, NAGPUR (MS)**

**NAME OF CONTRACTOR**

| Item No.   | Description  | Quantity | Rate<br>Rs. Ps. | Per  | Amount<br>Rs. Ps. |
|------------|--|----------|-----------------|------|-------------------|
| <b>(A)</b> | <b>High side work – Part C</b>   |          |                 |      |                   |
| 1          | Supply, installation, testing and commissioning at site of Wall Mounted split type having cordless remote conditioner and each unit comprising of rotary compressor cooling coil, multi speed fan motors, dynamically balanced blowers, synthetic washable filter including insulation and installation to wall with all required hardware, valves, supports etc including termination at nearest power outlet with copper wires of suitable capacity and rating in Metallic flexible conduit and interlocking in outdoor units. (unit shall confirmed with latest 5 star rating and to the detailed specification of tendered document and providing earthing of indoor unit complete with supplying of all material in all respect as per specifications and any other items required to make the system complete as required.) minimum 5 star AC <b>Hitachi/ Daikin/ Voltas/ Mitsubishi Electric make</b> |          |                 |      |                   |
| a)         | 2.00 TR Capacity ( Split type)   | 4        |                 | Nos. |                   |
| b)         | 1.5 TR Capacity ( Split type)  | 1        |                 | Nos. |                   |
| c)         | 1.0 TR Capacity ( Split type)  | ---      | ---             | ---  | ---               |
|            | <b>TOTAL PART (C)</b>  |          | <b>TOTAL</b>    |      |                   |

**Signature & Seal of Contractor**

**Regional Head**

Nagpur Region, Central Bank Of India,  
 Oriental Building, Second Floor,  
 LIC Square, Station Road,  
 Nagpur(M.S)

ANNEXURE- C-1  
**AIR- CONDITIONING WORK**  
**BRANCH**

**NAME OF WORK : TENDER FOR PROVIDING SPLIT TYPE AIR CONDITIONING WORKS TO BE EXECUTED FOR PROPOSED NANDANVAN BRANCH, CENTRAL BANK OF INDIA, NAGPUR (MS)**

**NAME OF CONTRACTOR**


| Item No.   | Description   | Quantity | Rate<br>Rs. Ps. | Per  | Amount<br>Rs. Ps. |
|------------|---|----------|-----------------|------|-------------------|
| <b>(B)</b> | <b>Low side work – Part C-1</b>   |          |                 |      |                   |
| 1          | Supply, installation, testing, commissioning of following sizes of copper refrigerant piping including necessary joints and accessories. brazing, insulation with Class-O nitrile tubular rubber sleeves sections of 09mm thickness for suction line and liquid line , suitable adjustable ring type hanger supports etc as required. |          |                 |      |                   |
| a)         | 5/8" (15.9 mm) dia (0.80 mm thick)  | 20.00    |                 | Rmt  |                   |
| b)         | 1/2" (12.7 mm) dia (0.80 mm thick)  | 20.00    |                 | Rmt  |                   |
| 2          | Supply, installation, testing, commissioning of following sizes of UPVC drain pipe (surface/ concealed) duly insulated with 9 mm thick closed cell nitrile foam insulation with all necessary fittings and U-trap etc complete as required.   |          |                 |      |                   |
| a)         | 25 mm dia   | 20       |                 | Rmt  |                   |
| b)         | 32mm dia  | 10       |                 | Rmt  |                   |
| 3          | Supplying and fixing of following sizes PVC insulated unarmoured copper conductor cable conforming to IS:1554 (Part-1) on surface/ concealed/ cable tray for connections indoor to outdoor unit completed etc. as reqd. 3 x 2.5 Sq. mm (as per BS EN 50288-7)   | 30       |                 | Rmt  |                   |
| 4          | Readymade powder coated M.S. stand  | 5        |                 | Nos. |                   |
| 5          | Installation testing and commissioning of High wall type  | 5        |                 | Nos. |                   |
| 6          | Stabilizer shall be Automatic version with copper coil  |          |                 |      |                   |
| a          | 5 KVA (For 2.0 TR Split AC)   | 4.00     |                 | Nos. |                   |
| b          | 4 KVA (For 1.5 TR Split AC)   | 1.00     |                 | Nos. |                   |
| c          | 3 KVA (For 1.0 TR Split AC)   | ---      | ---             | ---  | ---               |
| 7          | civil work including making of holes in wall as per   | 1        |                 | LS   |                   |
|            | <b>TOTAL PART (C-1)</b>   |          |                 |      |                   |

**Signature & Seal of Contractor**

**Regional Head**

Nagpur Region, Central Bank Of India,  
Oriental Building, Second Floor,  
LIC Square, Station Road,  
Nagpur(M.S)

APPROVED DT. 16/11/2024

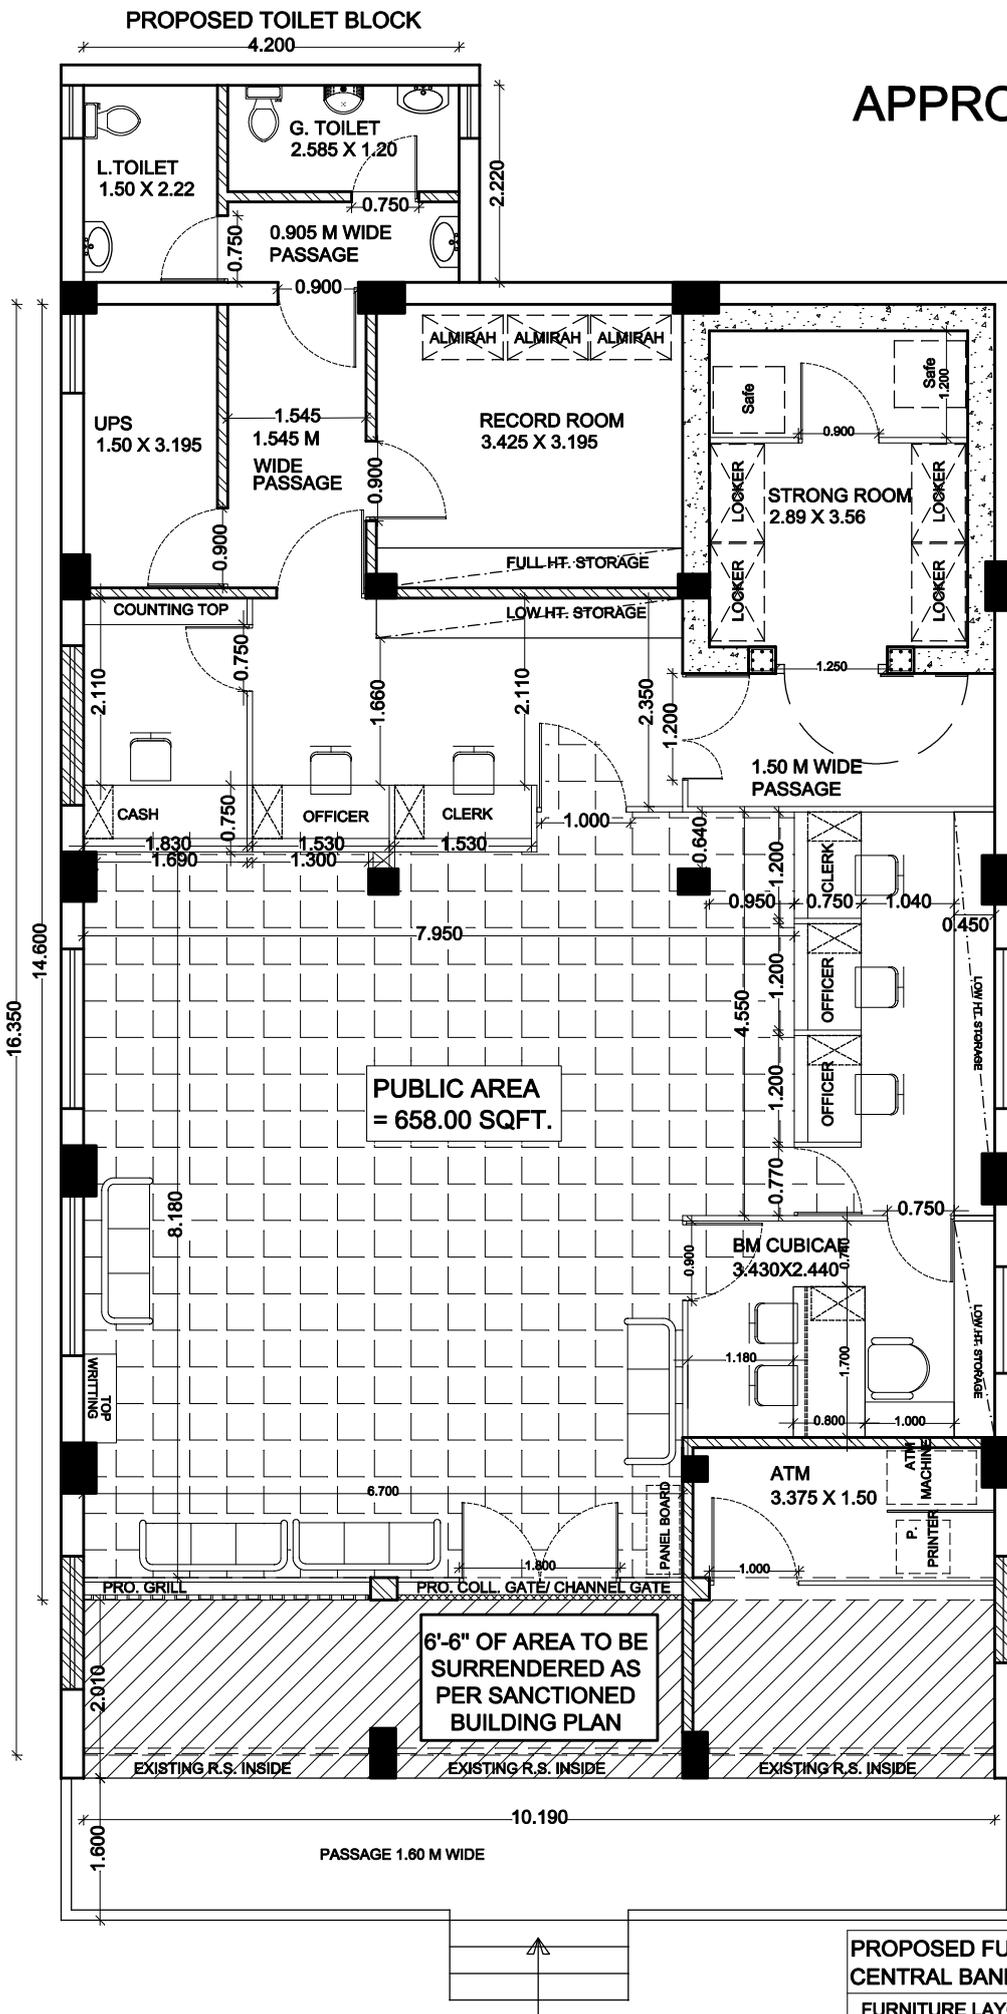

PUBLIC AREA  
= 658.00 SQFT.

6'-6" OF AREA TO BE  
SURRENDERED AS  
PER SANCTIONED  
BUILDING PLAN

TOTAL CARPET AREA  
= 1700.00 SQ.FT

UPPER GROUND FLOOR PLAN ( NANDANVAN BRANCH)

PROPOSED FURNITURE PLAN FOR NANDANVAN BRANCH,  
CENTRAL BANK OF INDIA, DISTT. - NAGPUR (M.S.)


FURNITURE LAYOUT PLAN

ARCHITECT :-



DRG. NO. :- 01  
SCALE :-  
DATE :- 13/11/2024  
DEALT :- VAISHNAVI

ASHISH S. NASHINE  
B- ARCH., M. I. C. A., A. I. I. A.,  
49, BAJAJ NAGAR  
NAGPUR - 10  
PH. No. 2231679, 2240670

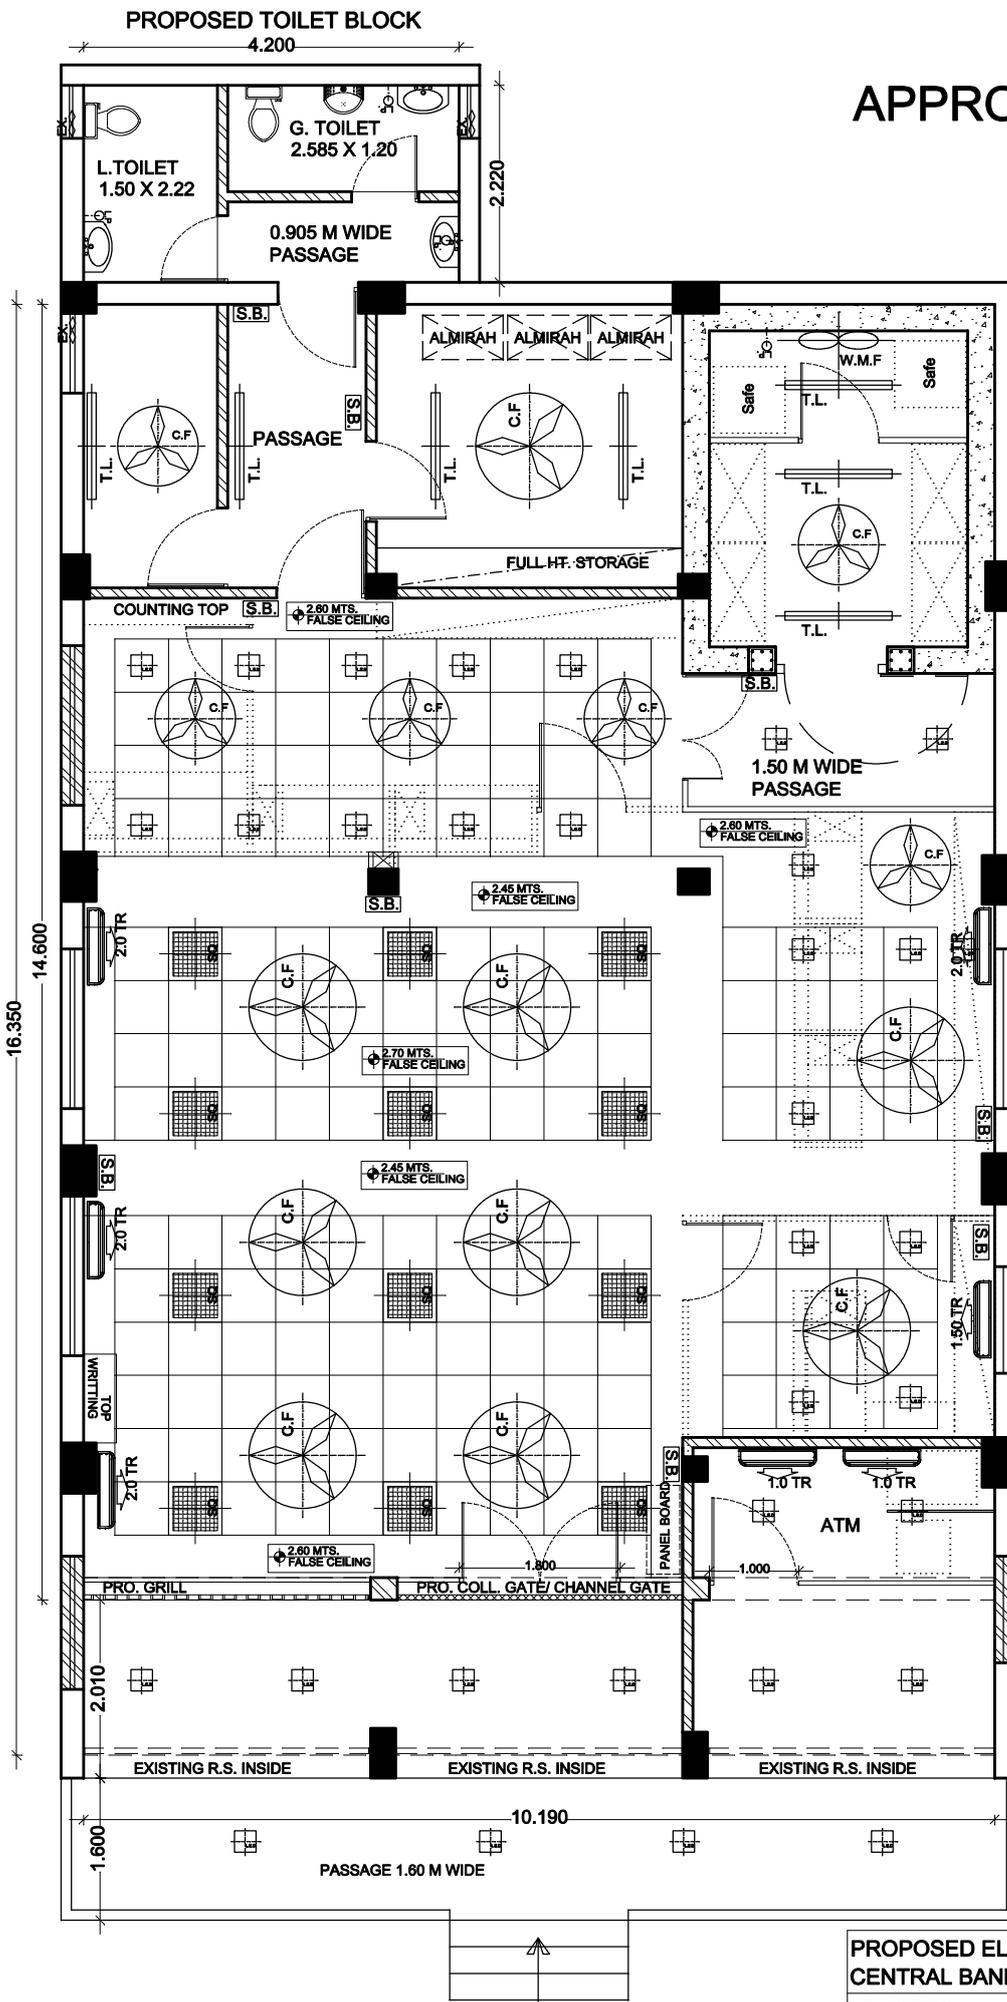

LEGEND

|  |   |         |
|--|---|---------|
|  | CEILING FAN<br>1.20 Mt Dia 09 No.<br>0.90 Mt Dia 06 No. | 15 Nos. |
|  | LED INDUSTRIAL<br>TUBE LIGHT                            | 08 Nos. |
|  | L.E.D LIGHT   | 32 Nos. |
|  | L.E.D SQ. PANEL<br>(600X600 MM)                         | 12 Nos. |
|  | WALL MOUNTED<br>FAN                                     | 01 Nos. |
|  | EXHAUST FAN   | 03 Nos. |
|  | LIGHT POINT   | 06 Nos. |
|  | SWITCH BOARD  | 08 Nos. |
|  | POWER POINT   | 10 Nos. |
|  | AIR CONDITIONER   | 09 Nos. |
|  | C.C. CAMERA   | 08 Nos. |
|  | HI Wall AC  |         |
|  | 1.0 TR  | 02 Nos. |
|  | 1.50 TR   | 01 Nos. |
|  | 2.0 TR  | 04 Nos. |

TOTAL CARPET AREA  
=1700.00 SQ.FT

UPPER GROUND FLOOR PLAN ( NANDANVAN BRANCH)

PROPOSED ELECTRICAL PLAN FOR NANDANVAN BRANCH,  
CENTRAL BANK OF INDIA, DISTT. - NAGPUR (M.S.)

ELECTRICAL LAYOUT PLAN

ARCHITECT :-



DRG. NO. :-

ASHISH S. NASHINE  
B- ARCH., M. I. C. A., A. I. I. A.,  
49, BAJAJ NAGAR  
NAGPUR - 10  
PH. No. 2231679, 2240670

SCALE :-

DATE :- 17/11/2024

DEALT :- VAISHNAVI

ROAD